



**For Security
Panomorph**

MP MEGA PIXELS

F 360 MP

Applicable camera (model)

1	2/3	1/2	1/3	1/4

FIXED

360°

2 Mega

DC

CS-mt


METAL

230

RoHS



- 360° view eliminates blind spots
- Optimized design for VGA to 2 Megapixel sensors, both Analog and IP cameras.
- Standard CS Metal Mount for 1/3" sensors.
- Equipped with 3 Axes Sensor Centering Adjustment.
- ImmerVision Enables® SDK available for DVR/ NVR/VMS (www.immervisionenables.com) integration.
- Patented Panomorph Optical Technology.

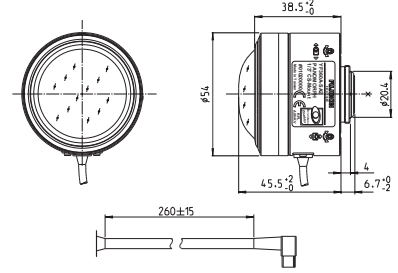

Focal length (mm)		0.9 (short axis) / 1.15 (long axis)
Iris range		F1.9 (short axis) / F2.4 (long axis)
Operation	Focus	manual
	Iris	Auto (DC Type)*
Angle of view (H x V)		182° x 182°
Anamorphic Ratio		1.3 (4:3)
Focusing Range (from front of the lens) (mm)		∞ ~ 20
Mount		CS
Mass (g)		180
Remarks		Sensor centering adjustment, ImmerVision Enables. (ImmerVision ID: RPL A0NKV) For further information, please visit www.immervision.com * When power is turned off, iris will automatically close



[Lens image]

