

2/3/4 Megapixel H.265 Remote Focus&Zoom Pro Bullet Network Camera





MS-C2862-F(I)PB/MS-C2962-(R)F(I)PB/MS-C3762-F(I)PB/
MS-C4462-F(I)PB



KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Integrated Motorized Varifocal Lens(Auto Focus)
- Built-in ICR Filter for Day/Night switching
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 35m
- Weather-proof IP66-rated Housing
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S
- Support high frame rate up to 60fps(Optional)

DIMENSIONS (mm)

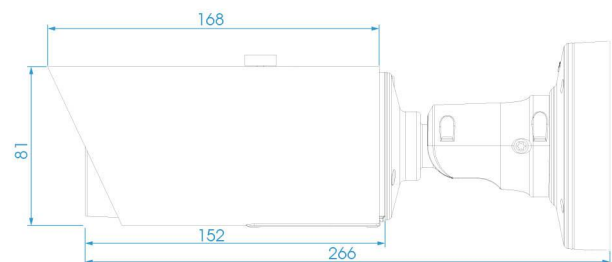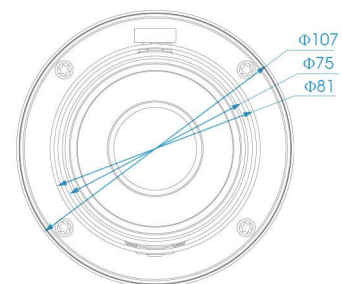

SUPPORTED BROWSERS





| | Model | MS-C2862-F(I)PB (2.0MP) | MS-C2962-(R)F(I)PB (2.0MP) | MS-C3762-F(I)PB (3.0MP) | MS-C4462-F(I)PB (4.0MP) |
|----------|----------------------|--|---|--|---|
| Camera | Image Sensor | 1/1.8" Exmor CMOS | 1/2.8" Progressive Scan CMOS | | 1/3" Progressive Scan CMOS |
| | Min. Illumination | Color:0.002Lux@F1.2 B/W:0Lux with IR on | | Color: 0.005Lux@F1.2 B/W: 0Lux with IR on | Color: 0.008Lux@F1.2 B/W: 0Lux with IR on |
| | WDR | Super WDR up to 120dB | Super WDR up to 140dB | Super WDR up to 120dB | |
| | Lens | Motorized 3.6~10mm@F1.4 P-Iris(Optional) | Motorized 3.0~10.5mm/7~22mm @F1.4 P-Iris(Optional) | | |
| | Mount | Φ14 | | | |
| | Field of View | H92°~H42°(3.6~10mm) | H90°~ H31°(3.0~10.5mm) | H80°~ H29°(3.0~10.5mm) | H76.2°~H25°(3.0~10.5mm) |
| | Shutter Time | 1/100000s~1/5s | | | |
| | IR Distance | Up to 35m | | | |
| | Day&Night | ICR Filter Auto Switch | | | |
| | Max Image Resolution | 1920×1080 | | 2048x1536 | 2592×1520 |
| Video | Frame Rate | 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576) | 60fps(1920×1080)(Optional) 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576) | 30fps(2048x1536), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576) | 20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704x576) |
| | Video Compression | H.265(HEVC)/H.264/MJPEG | | | |
| | Video Bit Rate | 16Kbps~16Mbps(CBR/VBR Adjustable) | | | |
| | Image Setting | Brightness/Contrast/Saturation/Sharpness | | | |
| Network | Ethernet | 1*RJ45 10M/100M Ethernet Port | | | |
| | Network Storage | NAS(Support NFS, SMB/CIFS) | | | |
| | Protocol | TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN | | | |
| Audio | Audio Compression | G.711/AAC | | | |
| | Audio I/O | 1/1 | | | |
| System | Alarm I/O | 1/1 | | | |
| | Storage | Support Micro SD/SDHC/SDXC Local Storage, up to 64G | | | |
| | Advanced Function | Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI | | | |
| | SIP/VoIP Support | Yes, Voice & Video-over-IP | | | |
| | Event Trigger | Motion Detection, Network Disconnection, etc. | | | |
| | Event Action | FTP Upload/SMTP Upload/ SD Card Record/ SIP Phone | | | |
| | System Compatibility | ONVIF Profile S | | | |
| General | WorkingTemperature | -30°C~60°C | | | |
| | Working Humidity | 0~90%(Non-condensing) | | | |
| | Power Supply | PoE/ DC12V±10% | | | |
| | Power Consumption | 5W MAX | 6W MAX | 6.5W MAX | 5W MAX |
| | | 9W MAX (With IR on) | 10.5W MAX (With IR on) | 10W MAX (With IR on) | 9W MAX (With IR on) |
| | Weather Proof | Up to IP66 Rating for Weather-resistant Performance | | | |
| | Weight | 1080g | | | |
| | Dimensions | Φ107mmX266mm | | | |
| Warranty | 2 Years | | | | |

Note: MS-C2962-(R)F(I)PB, R refers to High Frame Rate, F refers to Motorized Lens, I refers to P-Iris, P refers to PoE, B refers to H.265 V6.10

