

# 4K H.265 Pro NVR 5000 Series

4K	H.265 HEVC	Onvif	HDMI	VGA	Dual Stream	Audio Out
Alarm In/Out	ANR	ANPR	VCA	Online Upgrade	P2P	HTML5




[DATASHEET](#)

## KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 8\*1080P or 16\*720P for Milesight Pro NVR 5000 Series.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **2\*3.5" HDD** (2 SATA of 3.5" HDD, providing 10TB capacity for each HDD, up to 20TB total hard disk storage.)
- ▶ **Video Content Analysis** (With 10 detection modes, VCA greatly enhances the performance bringing comprehensive surveillance functions.)
- ▶ **ANR** (Can automatically replenish the recording gap due to internet interruptions (by storing at the edge).)

### H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.



### 4K Video Viewing Experience

Milesight 4K H.265 Pro NVR 5000 Series supports up to 4K definition (3840\*2160, effectively four times that of Full HD) live viewing, playback and recording, providing users with ultra-high-definition video viewing experience.



### Powerful Decoding Capacity

Maximum supporting 4\*1080P or 8\*720P for MS-N5008-UC, 8\*1080P or 16\*720P for MS-N5016-UT.



### Remote Access

Milesight 4K H.265 Pro NVR 5000 Series can be easily accessed and managed remotely via Milesight CMS and mobile APP.



# 4K H.265 Pro NVR 5000 Series




Model		MS-N5008-UC	MS-N5016-UT	
Video/Audio Input	Network Video Input	8-CH	16-CH	
	Bandwidth	Incoming	80Mbps	160Mbps
		Outgoing	80Mbps	160Mbps
Video/Audio Output	HDMI Output	1-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output		
	VGA Output	1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz		
	Dual Stream	Support		
	Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF		
	Synchronous Playback	1*(30fps @8MP), 1*(30fps @6MP), 1*(30fps @5MP), 2*(30fps @4MP), 2*(30fps @3MP), 4*(30fps @1080P), 8*(30fps @720P)	2*(30fps @8MP), 2*(30fps @6MP), 3*(30fps @5MP), 4*(30fps @4MP), 5*(30fps @3MP), 8*(30fps @1080P), 16*(30fps @720P)	
Video/Audio Compression	Video Compression	H.265*/H.265(HEVC)/H.264*/H.264		
	Audio Compression	G.711/AAC/G.722/G.726		
	Sample Rate	8KHz/16KHz		
	Synchronous Recording	8*5MP	16*5MP	
Storage	SATA	2*SATA HDD(3.5")		
	Capacity	Up to 10TB capacity for each HDD		
Recording Management	Recording Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)		
	Snapshot Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)		
	Playback Type	General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback		
Backup	Backup	Video Backup, Image Backup		
Network	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS		
External Interface	Network Interface	1*RJ45 10/100/1000Mbps		
	USB Interface	2*USB 2.0	1*USB 3.0; 1*USB 2.0	
	Audio Input/Output	1*RCA/1*RCA		
	Alarm Input/Output	4-CH/1-CH		
General	Compatibility	ONVIF, API		
	Advanced Function	ANR		
	ANPR	Support		
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed		
	Keyboard Control	Milesight Keyboard (MS-K01)		
	Power Supply	DC 12V 50Hz~60Hz		
	Consumption	≤3W(Without HDD)	≤10W(Without HDD)	
	Working Conditions	Temperature: -10℃~55℃ / Humidity: 10%~90%		
	Dimensions	Rack Mountable Chassis (1.0U Standard) 380mm(W)X317.6mm(D)X51.8mm(H)		
	Weight	1.9Kg		
Warranty	3/5 Years			

# 4K H.265 Pro NVR 5000 Series





## Interfaces

MS-N5008-UC

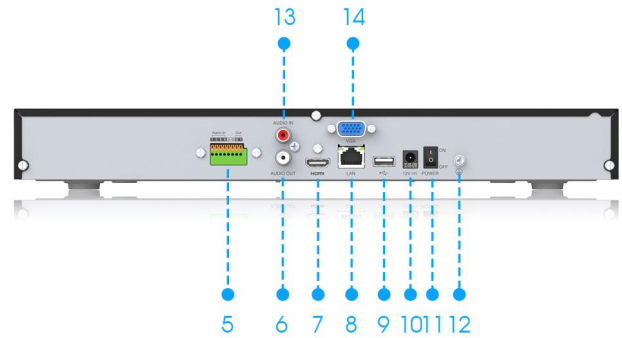


- 1. Run Indicator    2. HDD Indicator    3. Power Indicator    4. USB    5. Alarm In/Out    6. Audio Out    7. HDMI
- 8. Ethernet Port    9. USB    10. Power    11. Power Button    12. GND    13. Audio In    14. VGA

MS-N5016-UT

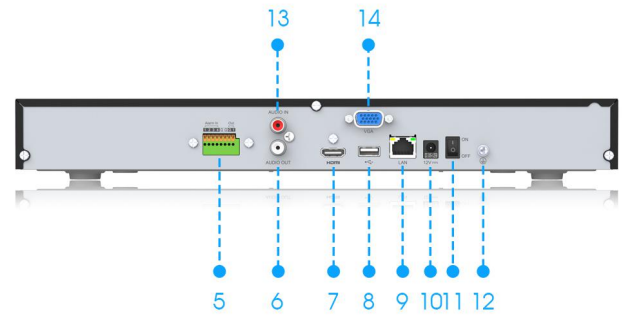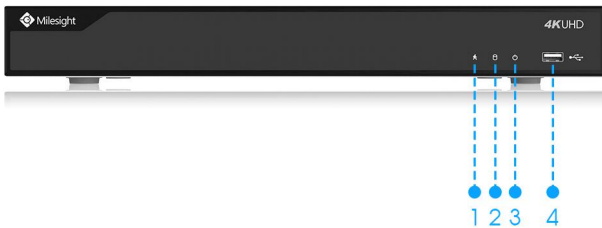

- 1. Run Indicator    2. HDD Indicator    3. Power Indicator    4. USB    5. Alarm In/Out    6. Audio Out    7. HDMI    8. USB
- 9. Ethernet Port    10. Power    11. Power Button    12. GND    13. Audio In    14. VGA

## Structure Diagrams

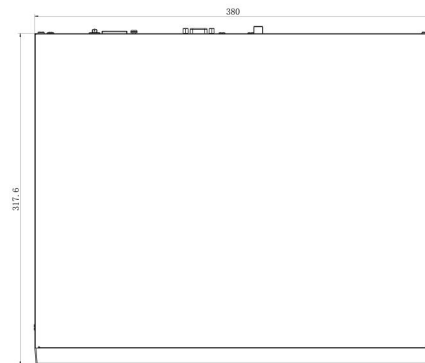

Units: mm

## Naming Convention



MileSight Technology Co.,Ltd. | [www.milesight.com](http://www.milesight.com)

Contact Us: [sales@milesight.com](mailto:sales@milesight.com)    [support@milesight.com](mailto:support@milesight.com)

Add: 220 NE 51st Street, Oakland Park, Florida 33334, USA  
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro 116beon-gil, Dongan-gu, Anyang-si, Korea  
Tel: +82-31-990-7732

Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China  
Tel: +86-592-5922772

