

LAB T7504V


Weatherproof IR Camera



FEATURES

- › 1000TVL, 1/3"Sony 1.3 Mega-pixel DIS
- › 8PCs Super High Power IR LEDs
- › 2.8-11mm Varifocal IR Lens
- › Removable IR Cut Filter
- › IR Range: 30~35M (98.4~ 114.8ft) (Outdoor)
- › Current Consumption: 750mA (MAX)
- › Viewing angle: Horizontal: 90° — 28°
- › Feature: 3DNR

DIMENSIONS

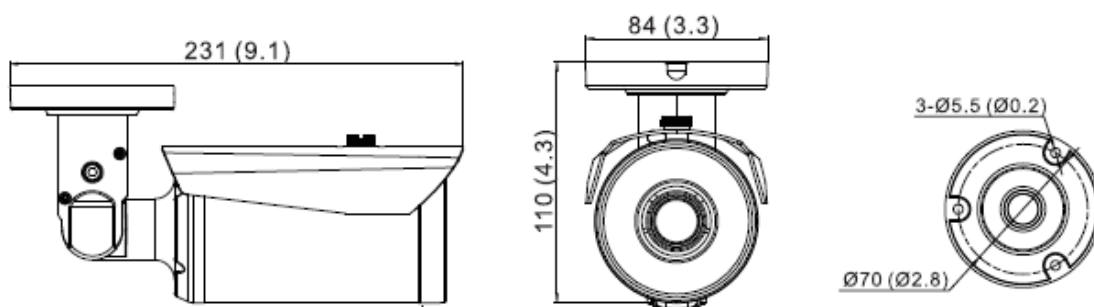

SPECIFICATIONS

IP Rating	IP66
Type	Removable IR Cut Filter
Signal System	NTSC/PAL
Pick Up Device	1/3" Sony 1.3 Mega-pixel DIS
Picture Elements	NTSC:1280(H)X900(V) PAL:1280(H)X1024(V)
Resolution	1000TVL
Min Illumination	0Lux (8 Pcs super high power IR LED)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Horizontal Frequency	NTSC:15.734KHz PAL:15.625KHz
Clock Frequency	NTSC/PAL:6MHz
Scanning System	2:1 Interlace
S/N Ratio	≥42dB
Lens	2.8-11mm Varifocal IR Lens
Viewing Angle	Horizontal: 90°— 28°
White Balance	AUTO Tracking
Back Light Compensation	OFF
Auto Gain Control	OFF
OSD	YES
NR	3DNR
GAMMA	0.45
Video Out-put	1V p-p,75Ω
Power Supply	DC12V ±10%
Current Consumption	750mA(MAX)
IR Effect Distance	30~35M (98.4~ 114.8ft)
Dimension	231×84×110mm (9.1"×3.3"×4.3")
Weight	420g (14.8oz)
Storage Temperature	-30~+60℃ (-22~+140°F)
Operating Temperature	-30~+40℃ (-22~+104°F)