

User-friendly Professional LCD Touch Keyboard



5" TFT Touch LCD System Control Keyboard

SPC-6000

The SPC-6000 is able to control up to 255 individual PTZ domes, DVRs and matrix switchers. It can be used in conjunction with up to 16 additional SPC-6000 units providing flexible expansion up to very large systems with user-friendly centralized control. The built-in 5" colour LCD touch panel provides an easy way to select camera locations and navigate control features such as video playback and preset positions, making it easy to manage a complete CCTV system. The 3D joystick and jog shuttle can be detached and placed on either the left or the right hand side of the controller making it suitable for left and right handed operation and it's ergonomic design makes it very comfortable for use over sustained periods.

- Built-in 5" colour TFT touch LCD screen
- Centralized control - up to 255 units with a single controller
- Flexible expansion to larger systems - up to 16 controllers
- 3D joystick to control PTZ functions
- Detachable joystick/jog shuttle for left/right handed use
- Multi-protocol support

5" TFT Touch LCD System Control Keyboard

SPC-6000




Specifications

| SPC-6000 | |
|-------------------------|--|
| COMMUNICATION | |
| Interface | RS-485/422 (Operating distance 1km), TTL (Matrix) |
| Data Port | 8-pin RJ-45 connector (Female) (RS-485 serial port) BNC (Video input, Loop through), USB 2.0 (F/W updatable) |
| Baud Rate | 2,400 ~ 38,400bps |
| Control Unit | 255unit (PTZ / DVR / MATRIX / RECEIVER) |
| PTZ | SRD, SVR, SRP, Pelco-D/P, Panasonic, Vicon, AD, Honeywell, ELMO, Bosch, GE |
| DVR | Samsung-T/E |
| Protocol | Matrix SMX-25632 |
| Receiver | Samsung-T |
| OPERATIONAL | |
| LCD Display | 5" TFT touch LCD |
| Joystick | 3 Axis twist zoom |
| Jog Shuttle | DVR playback control |
| On Screen Display | English, French, German, Spanish, Italian, Chinese, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish, Portuguese |
| ENVIRONMENTAL | |
| Operating Temperature | 0°C ~ 40°C |
| Operating Humidity | 10 ~ 70% (Non-condensing) |
| ELECTRICAL | |
| Input Voltage / Current | 12V DC / 4A |
| Power Consumption | Max. 4W |
| MECHANICAL | |
| Dimensions (WxHxD) | 459 x 59 x 178mm (18.07" x 2.32" x 7") |
| Weight | 1.5Kg (3.3 lb) |

Dimensions

Unit : mm (inch)

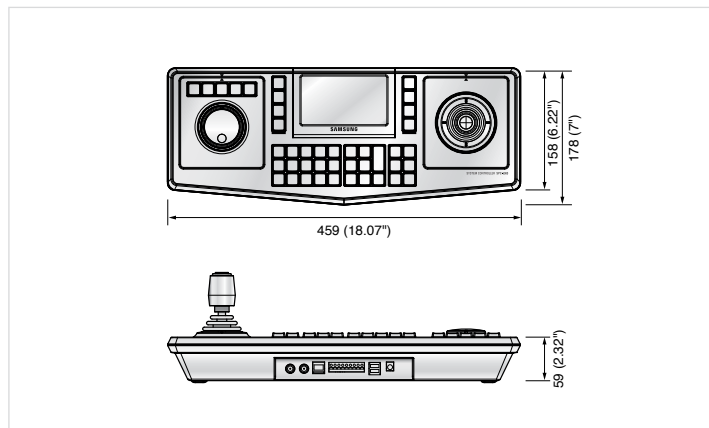

The Eco mark represents Samsung Techwin's will to create environment-friendly products and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741~8749, 8752-8760 Fax : +82-31-8018-3745
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA Inc.
1480 Charles Willard St. Carson, CA 90746, UNITED STATES
Tel Free : +1-877-213-1222 Fax : +1-310-632-2195
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillswood Drive, Hillswood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 0PS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY

