

# 2/3/4 Megapixel H.265 Mini Bullet Network Camera





MS-C2963-PB/MS-C3763-PB/MS-C4463-PB



## KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 25m
- Weather-proof IP67-rated Housing
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S

## DIMENSIONS (mm)

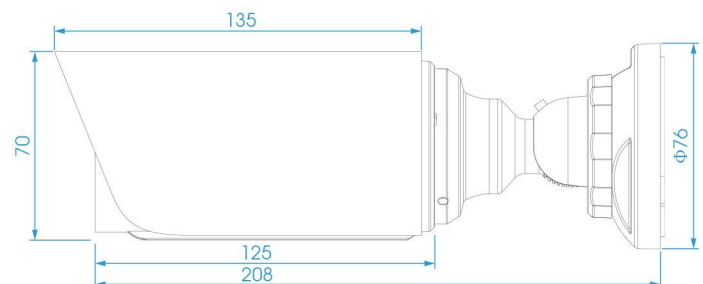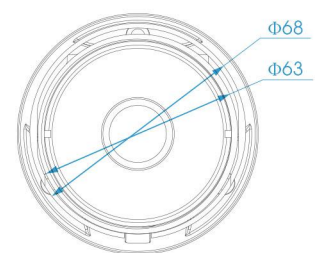

## SUPPORTED BROWSERS



Firefox

IE

Chrome

Safari



	Model	MS-C2963-PB (2.0MP)	MS-C3763-PB (3.0MP)	MS-C4463-PB (4.0MP)
Camera	Image Sensor	1/2.8" Progressive Scan CMOS		1/3" Progressive Scan CMOS
	Min. Illumination	Color: 0.002Lux @F1.2 B/W: 0Lux with IR on	Color: 0.005Lux @F1.2 B/W: 0Lux with IR on	Color: 0.008Lux @F1.2 B/W: 0Lux with IR on
	WDR	Super WDR up to 140dB	Super WDR up to 120dB	
	Lens	4mm/6mm @F1.6		
	Mount	M12		
	Field of View	H62.4°(4mm)	H71°(4mm)	H62.4°(4mm)
	Shutter Time	1/100000s~1/5s		
	IR Distance	Up to 25m		
	Day&Night	ICR Filter Auto Switch		
Video	Max Image Resolution	1920×1080	2048×1536	2592×1520
	Frame Rate	30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	30fps(2048×1536), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)
	Video Compression	H.265(HEVC)/H.264/MJPEG		
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)		
	Image Setting	Brightness/Contrast/Saturation/Sharpness		
Network	Ethernet	1*RJ45 10M/100M Ethernet Port		
	Network Storage	NAS(Support NFS, SMB/CIFS)		
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN		
System	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G		
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, etc.		
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ SIP Phone		
	System Compatibility	ONVIF Profile S		
General	Working Temperature	-30℃~60℃		
	Working Humidity	0~90%(Non-condensing)		
	Power Supply	PoE		
	Power Consumption	2.5W MAX	2.5W MAX	2.5W MAX
		5W MAX (With IR on)	5.5W MAX (With IR on)	5W MAX (With IR on)
	Weather Proof	Up to IP67 Rating for Weather-resistant Performance		
	Weight	765g		
	Dimensions	Φ76mmX208mm		
Warranty	2 Years			

Note: MS-C2963-PB, P refers to PoE, B refers to H.265

V6.10

Milesight Technology Co.,Ltd. | www.milesight.com



Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China  
Tel: +86-592-5922772 Mail: sales@milesight.com

